

IN PURSUIT OF GROWTH & EXCELLENCE



SDP Series AC SERVO SYSTEM

The Best Drive for Smart Machinery



automation.seec.com.tw

SDP Series

Ultra-evolutional Design

Advanced Utility for Industrial Equipment



INDEX


Features -----	2
Servo Motors Model Definition -----	4
Servo Drives Model Definition -----	4
Servo Motor Specifications -----	5
Servo Drive Specifications -----	7
Wiring Diagram -----	8
Connections with Peripheral Equipment -----	11
Servo Drive Dimensions -----	12
Servo Motor Torque Curves -----	13
Servo Motor Dimensions -----	15
Optional Accessories -----	17
EtherCAT Master Controller Information -----	18

Features


One touch tuning




"Simple tuning" reduces the adjustment time effectively and maximizes the performance of the driver.

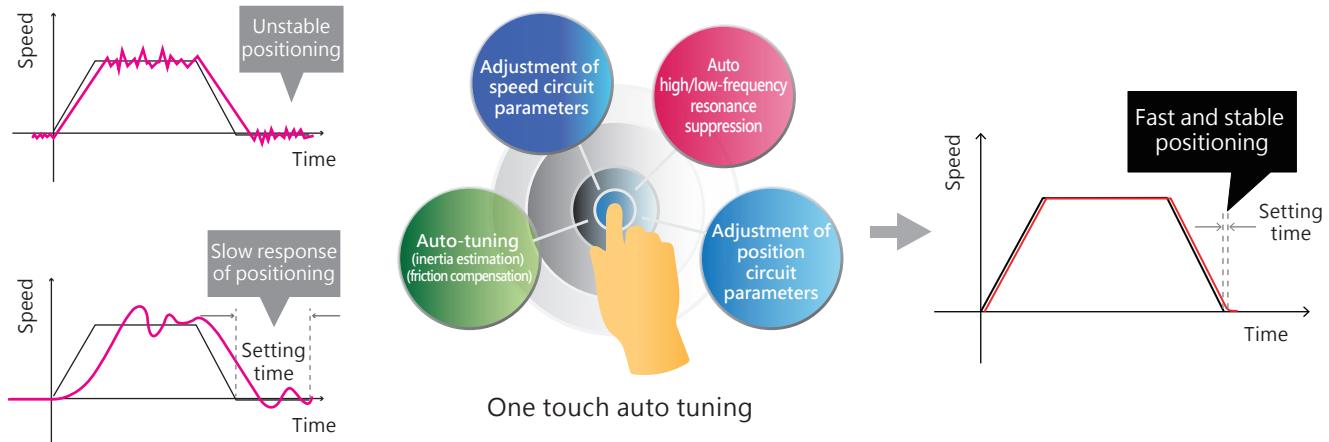

Faster response

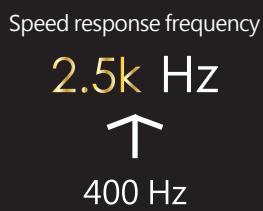

With outstanding speed response, it can greatly shorten the setting time to 1ms, featured by high speed, high response and accurate positioning.

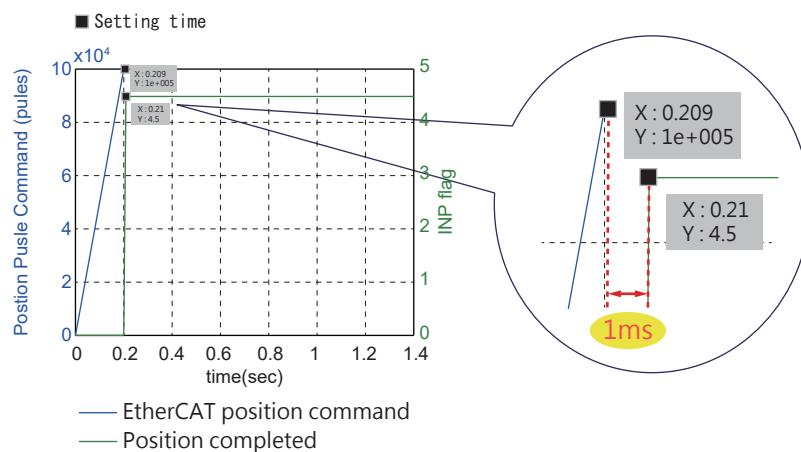

High-resolution



High-resolution Encoder

24 Bit


16,777,216 pulse/rev

It is equipped with Japanese high-level absolute position encoder. The resolution is up to 16777216 pulse/rev. This can make the position control more accurate and improve the stabilities at low speed.

*For medium capacity servo drive (1kW or above), the encoder resolution is 23 Bit, 8,388,608 pulse/rev.

Auto friction compensation


It can effectively reduce the position deviation when the running motor changes direction, and also increase the stability when running at low speed.

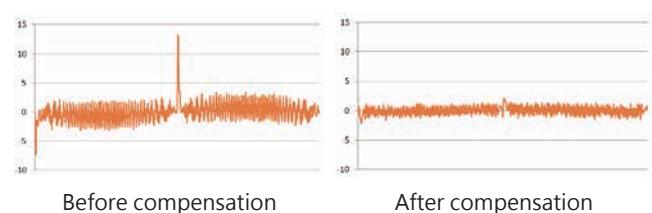

Features


Suppress resonance frequency and vibration —

To inertia system of mechanical, both two low-frequency vibrations could be suppressed at the same time by vibration control algorithms. This can suppress the residual vibration from the end of arm to main body. Automatic high/low-frequency vibration suppression function could be turned on directly in motion mode, which can search for the vibration frequency and turn on the filter, so as to suppress the mechanic resonance. This can further shorten the setting time and improve equipment performance.

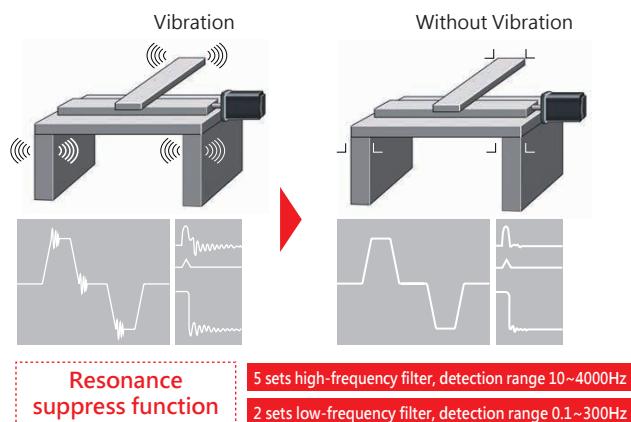


Friction compensation and backlash compensation —

It improves the commutation error effectively and increases the circularity.

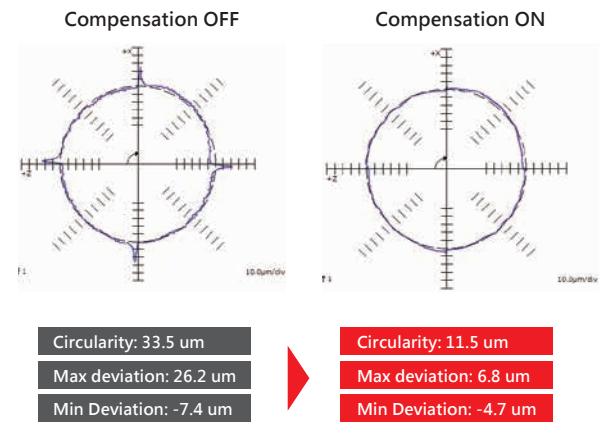


Motor diversification and performance enhancement


① The motor cogging torque lower than 1.5% increases the smoothness of running at fixed speed and processing at low speed, which achieves the reduction of 25% than SMA in the past.

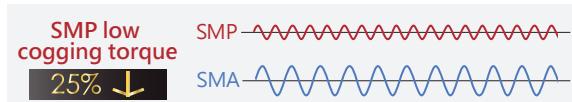


② Speed increasing and better torque output help to enhance the performance (productivity).

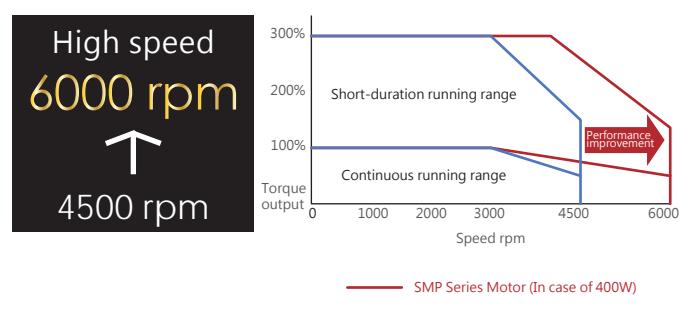

Absolute Position System Optional




Use optional battery to memory absolute position when power-off.
(Absolute motor and battery are optional)

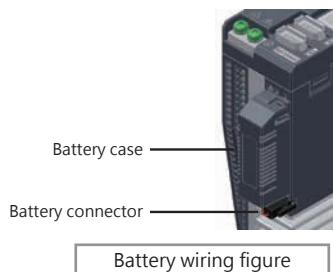


Safe Torque Off (STO)

STO function is supported to enhance the integrity of equipment and factory safety.

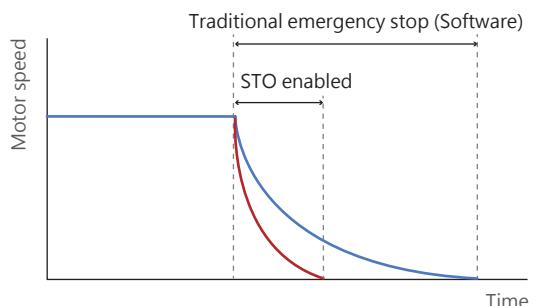


Electronics cam

The cam profile can be planned as high as 720 points, which can be applied in cam control of printing machine/labeling machine/packaging machine/fly shearing/cutting/etc.

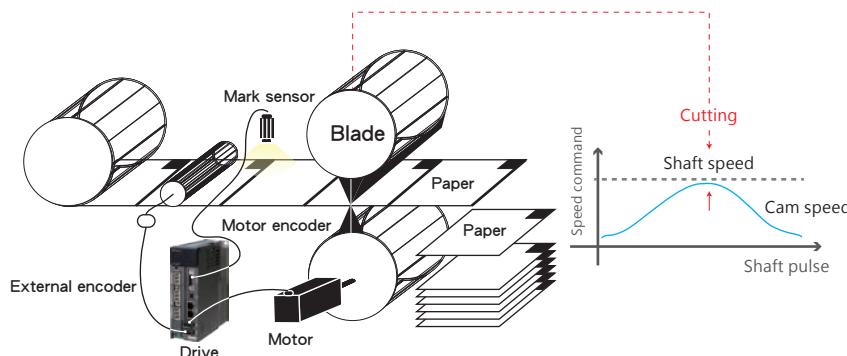

Full-closed Loop Control

It can be connected with external optical scale or encoder, and control the position accurately through signal of terminal position feedback, so as to reduce the impact of backlash and flexibility of the transmission mechanism, ensuring the positioning accuracy on machine end.

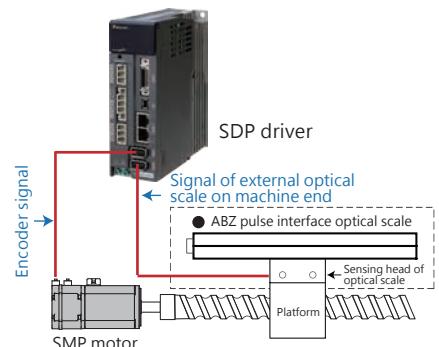

ETG Certification

With international certification, it guarantees the performance and functionality.



Unique among
Taiwan's manufacturers

Shortest communication cycle time in the industry

It can support minimum 100us cycle time, achieving High-speed and High precision in motion control.



Model Definition

Servo Motors Model Definition

SMP- L		010				30		S		A		A	
Series	Inertia	Motor capacity				Motor Rated Rotation		Encoder resolution		With brake and Oil Seal		Key and Cable	
L	Low inertia	005	50W	100	1KW	20	2000	S	Incremental type	A	No brake/ No oil seal	A	No key/Cable leading load side
M	Medium inertia	010	100W	150	1.5KW	30	3000	M	Absolute position type	B	With brake/ No oil seal	B	With key/ Cable leading load side
		020	200W	200	2KW					C	No brake/ Oil seal	C	No key/Cable leading opposite load side (Optional)
		040	400W	300	3KW					D	With brake/ Oil seal	D	With key/Cable leading opposite load side (Optional)
		075	750W	500	5KW								
				700	7KW								

Servo Drives Model Definition

SDP -		010				E2		C	
Series		Motor Capacity				Input Voltage		Model code	
010		100W	100	1KW		1-phase or 3-phase · AC200~240V		Closed-loop type	
020		200W	150	1.5KW					
040		400W	200	2KW					
075		750W	300	3KW					
			500	5KW					
			700	7KW					

Servo Motor Specifications

Small Capacity Low Inertia / Medium Capacity Low Inertia

Servo motor model SMP - L□□□	Unit	005	010	020	040	075	100	150	200	300
Corresponding drive model SDP - □□□E2C		010		020	040	075	100	150	200	300
Rated output capacity	W	50	100	200	400	750	1000	1500	2000	3000
Rated torque ^(Note 1)	Nm	0.16	0.32	0.64	1.27	2.4	4.78	7.16	9.55	14.3
Maximum torque	Nm	0.48	0.96	1.92	3.81	7.2	14.4	21.6	28.5	43.0
Rated speed	rpm			3000				2000		
Maximum speed	rpm			6000				3500		
Rate current	A	0.43	0.85	1.7	2.8	5.8	5.8	8.5	11	16
Maximum current	A	2.7	2.7	5.2	9.0	18.5	17.4	25.2	33	48
Rotary inertia $J \times 10^{-4}$ ^(Note 2)	kg·m ²	0.0295 (0.0299)	0.0518 (0.0523)	0.161 (0.178)	0.277 (0.294)	1.07 (1.11)	6.1 (8.0)	8.8 (10.7)	11.5 (13.5)	16.7 (18.7)
Power rate at continuous rated	kW/s	8.6	19.6	25.2	58.5	53.3	37.6	58.3	79.3	122.9
Insulation class	--			CE(B)				CE(F)		
Insulation resistance	--			100MΩ @ DC 500V						
Insulation voltage	--			60sec @ AC 1500V						
Encoder resolution	--			Resolution 24bit (16,777,216 Pulse)			Resolution 23bit (8,388,608 Pulse)			
Structure ^(Note 3)	--			Totally enclosed, natural cooling (IP rating: IP65) ^(Note 4)						
Vibration rank	--			V-15						
Environment	Storage temperature	--		0°C ~ 40°C(non freezing) / Storage:-15°C ~ 70°C(non freezing)						
	Storage Humidity	--		Below 80%RH (non condensing) / Storage : Below 90%RH (non condensing)						
	Altitude	--		Between sea level and 1000 m						
	Ambience	--		Indoor (avoid direct sunlight); no corrosive gas, no flammable gas, no oil mist or dust						
	Vibration Resistance	--		5G			2.5G			
Permissible load for the shaft ^(Note 4)	Fd	mm	20	25	35		50			
	Radial load Fr	N	68.6	245	392		490			
	Axial load Fa	N	39.2	98	147		196			
Electromagnetic brake specification ^(Note 5)	Input	V		DC 24V ± 10%						
	Brake	Nm	0.3	1.3	2.4		8.5		15	
	Power consumptio	W	6.3	7.9	8.6		19.3		19.3	
	Current consumptio	A	0.24	0.32	0.35		0.8		0.8	
	Resistor@20°C	Ω	92.4	75.4	67		29.8		29.8	
	Open time	ms	20	30	50		40		40	
	Close time	ms	20	20	20		25		25	
Weight ^(Note 6)	kg	0.33 (0.55)	0.45 (0.67)	0.85 (1.23)	1.23 (1.59)	2.24 (2.87)	5.2 (7.0)	6.5 (8.3)	7.7 (9.5)	10.2 (12.0)

Note 1 : For the motion mechanism of lifting axis or reciprocating load, it is recommended keeping the load rate below 75%.

Note 2 : () is the rotary inertia and weight for the models with electromagnetic brake.


Note3 : IP rating 65 is for the motor body only, not including the output axis and connector.

Note 4 : The permissible load for the shaft is as shown in the figure on the right.

Note 5 : The brake is used to stop or fix the machine, which can't be used for braking the motion mechanism.

Note 6 : () is the weight of the electromagnetic brake.

Diagram of permissible load for the shaft



■ Medium Capacity Medium Inertia

Servo motor model SMP - M□□□20	Unit	100	150	200	300	500	700
Corresponding drive model SDP - □□□E2C		100	150	200	300	500	700
Rated output capacity	W	1000	1500	2000	3000	5000	7000
Rated torque <small>(Note 1)</small>	Nm	4.78	7.16	9.55	14.3	23.9	33.4
Maximum torque	Nm	14.4	21.6	28.5	43.0	71.7	100.2
Rated speed	rpm			2000			
Maximum speed	rpm		3500			2000	
Rate current	A	5.8	8.5	11	16	22	30
Maximum current	A	17.4	25.2	34.7	48	66	90
Rotary inertia	kg·m ²	10.3 (12.2)	15.0 (17.0)	32.1 (42.4)	61.2 (71.6)	84.6 (95)	121.6 (132)
Power rate at continuous rated	kW/s	22.1	34.2	28.4	33.5	68	92
Insulation class	--			CE(F)			
Insulation resistance	--			100MΩ @DC 500V			
Insulation voltage	--			60sec @ AC 1500V			
Encoder resolution	--			Resolution 23bit (8,388,608 Pulse)			
Structure <small>(Note 3)</small>	--			Totally enclosed, natural cooling (IP rating: IP65) <small>(Note 4)</small>			
Vibration rank	--			V-15			
Environment	Storage temperature	--		0°C ~ 40°C(non freezing) / Storage:-15°C ~ 70°C(non freezing)			
	Storage Humidity	--		Below 80%RH (non condensing) / Storage : Below 90%RH (non condensing)			
	Altitude	--		Between sea level and 1000 m			
	Ambience	--		Indoor (avoid direct sunlight); no corrosive gas, no flammable gas, no oil mist or dust			
	Vibration Resistance	--		2.5G			
Permissible load for the shaft <small>(Note 4)</small>	Fd	mm	50	70	78		
	Radial load Fr	N	490		980		
	Axial load Fa	N	196		392		
Electromagnetic brake specification <small>(Note 5)</small>	Input	V		DC 24V ± 10%			
	Brake	Nm	8.5		45		
	Power consumptio	W	19.3		34		
	Current consumptio	A	0.8		1.41		
	Resistor@20°C	Ω	29.8		17		
	Open time	ms	40		110		
	Close time	ms	25		30		
Weight <small>(Note 6)</small>	kg	5.6 (7.4)	6.9 (8.7)	10.5 (15.8)	15.3 (20.6)	19.1 (24.4)	24.5 (29.8)

Note 1 : For the motion mechanism of lifting axis or reciprocating load, it is recommended keeping the load rate below 75%.

Note 2 : () is the rotary inertia and weight for the models with electromagnetic brake.


Note3 : IP rating 65 is for the motor body only, not including the output axis and connector.

Note 4 : The permissible load for the shaft is as shown in the figure on the right.

Note 5 : The brake is used to stop or fix the machine, which can't be used for braking the motion mechanism.

Note 6 : () is the weight of the electromagnetic brake.

Diagram of permissible load for the shaft




Servo Drive Specifications

Servo drive model SDP-□□□E2C		010	020	040	075	100	150	200	300	500	700					
Servo motor model SMP-□□□□		L005	L020	L040	L075	L100	L150	L200	L300	M500	M700					
		L010				M100	M150	M200	M300							
Servo motor power		50W	200W	400W	750W	1.0KW	1.5KW	2KW	3KW	5KW	7KW					
		100W														
Main Circuit Power	Input	Voltage 50/60Hz	1-phase or 3-phase AC 200~240V						3-phase AC 200~240V							
		Permissible Voltage Fluctuation 50/60Hz	1-phase or 3-phase AC 170~264V						3-phase AC 170~264V							
		Permissible Frequency Fluctuation	±5%													
	Output	Voltage	AC 0~240V													
Control Circuit Power	Current	1.0A	1.8A	3.2A	5.4A	6.4A	9.4A	12.1A	17.6A	21.2A	30.2A					
	Frequency	0~250Hz														
	Voltage 50/60Hz	1-phase AC 200~240V														
	Permissible Voltage Fluctuation 50/60Hz	1-phase AC 170~264V														
Protective Functions	Permissible Frequency Fluctuation	±5%														
	Power Consumption (W)	30														
	Control Method	3-phase full wave rectify, IGBT-PWM controlled (SVPWM drive)														
	Dynamic brake	Built-in (hardware)														
Encoder Feedback		50W~750W: Incremental / Absolute 24bit / 1KW~3KW: Incremental / Absolute 23bit														
Communication Interface		EtherCAT、USB														
(CSP) Position Control Mode	Command Control	EtherCAT communication control														
	Command Smoothing	Low-pass filter / Linear / PS curve														
	Command Pulse Multiplying factor	Electronic gear A/B ratio A: 1~4194304, B: 1~4194304 (Limitation:1/50 < A/B < 64000)														
	Error Excessive	±3 rotations														
	Torque Limit	EtherCAT communication control														
	Feedforward Compensation	Internal parameter setup or EtherCAT communication control (0~200%)														
(CSV) Speed Control Mode	Speed Control Range	1:5000														
	Command Control	EtherCAT communication control														
	Command Smoothing	Low-pass filter / Linear acceleration and deceleration curve / S curve														
	Speed Fluctuation Rate	Load fluctuation 0 ~ 100%(maximum) ±0.01% power fluctuation ±10%(maximum)0.01%														
	Torque Limit	EtherCAT communication control														
	Bandwidth	Maximum 2.5KHz														
Torque Limitation Mode	Command Control	EtherCAT communication control														
	Command Smoothing	Low-pass filter														
	Speed Limit	EtherCAT communication control														
Input and Output Signals	Digital Input	Servo on, forward and backward inhibit limits, pulse error clear, torque direction selection, speed command selection, positioning command selection, forward and backward rotation direction selection, proportion control switching, torque limit switching, abnormal alarm reset, emergency stop, forward/reverse inhibit limit, control														
	Digital Output	Torque limit reached, speed limit reached, reserved signal, zero speed reached, position reached, speed reached, alarm display, alarm signal, homing completed, overload level arrived, internal position arrived, position command overflow, forward software limit arrived, reverse software limit arrived, capture program completed, E-CAM master position area														
Environment	Temperature	0°C~55°C (Force air circulation in the surrounding area if the temperature goes beyond 45 °C);Storage: -20~65°C (non freezing)														
	Humidity	Maximum 90% RH (non condensing) ; Storage: Below 90% RH (non condensing)														
	Installation Location	Indoor (avoid direct sunlight); no corrosive gas, no flammable gas, no oil mist or dust														
	Altitude	Between sea level and 1000 m														
	Vibration	Maximum 5.9m/s ²														
Cooling System		Natural cooling, open				Fan cooling, open										
Weight (kg)		1.4				1.7	2.6		5.9							

Wiring Diagram

COE Mode : EtherCAT Mode

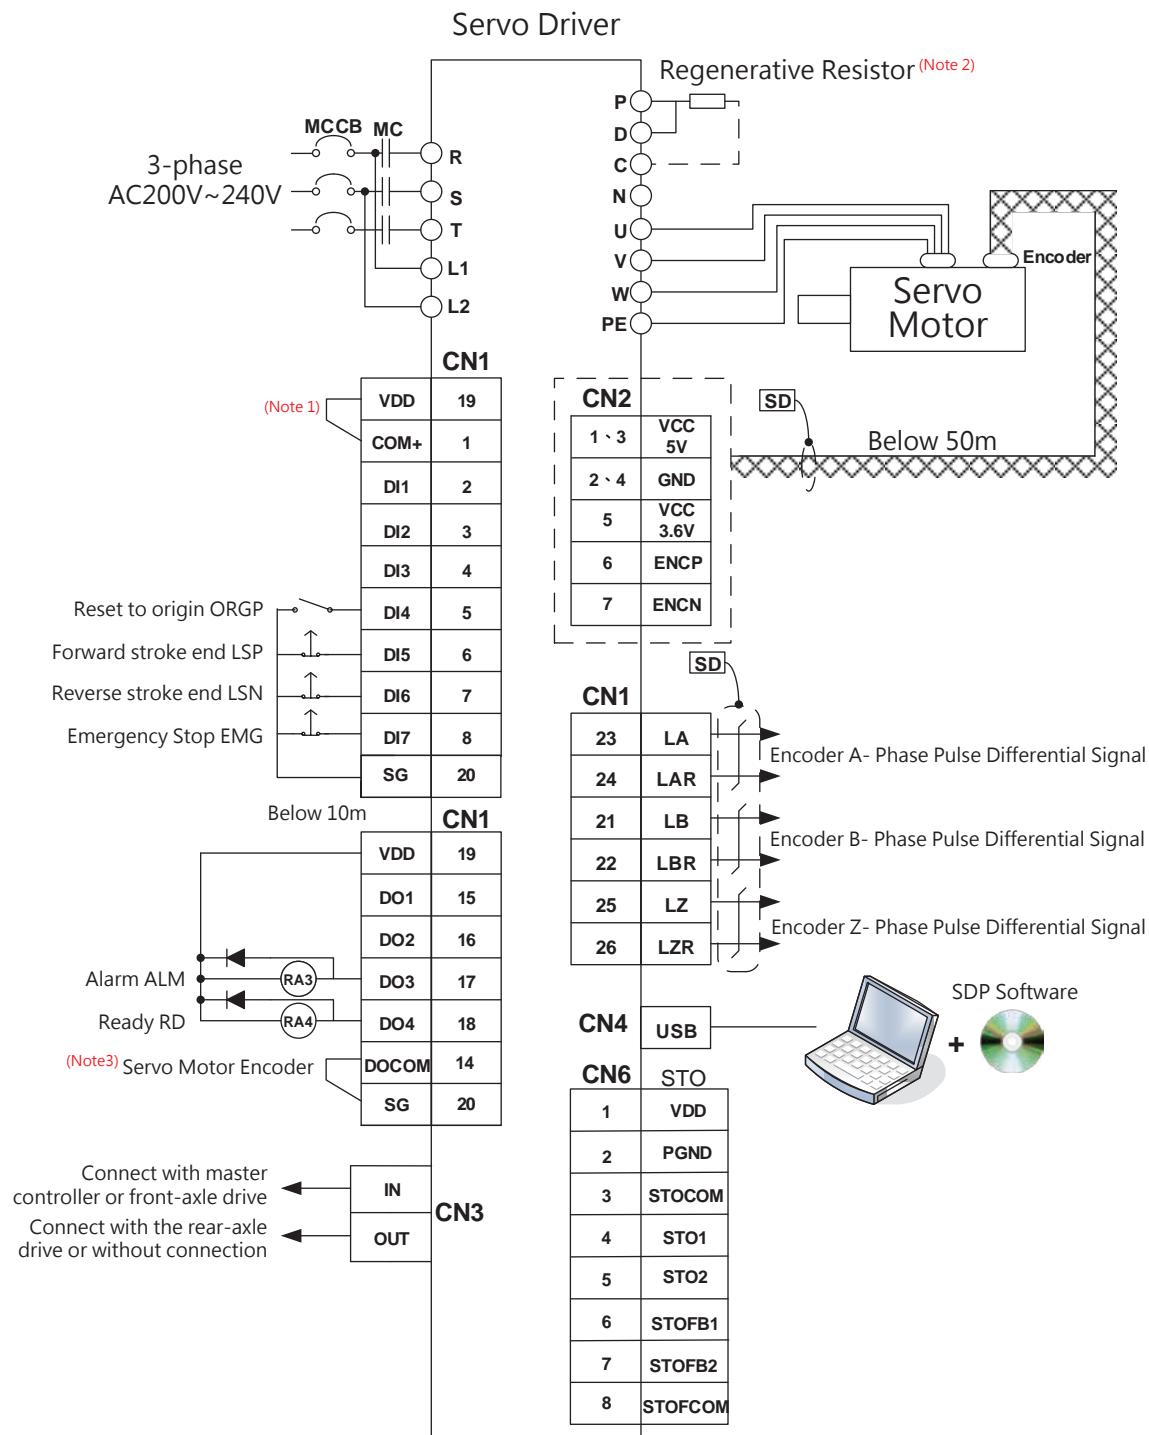


Notes

- Note 1 : If external power is used, VDD cannot be connected to COM +.
- Note 2 : Please refer to the manual for the wiring of regenerative resistor and brake units.
- Note 3 : Please refer to the manual for the Sink Type and Source Type DO output wiring.

Wiring Diagram

Pr Mode: Built-in Single-axis Control Mode

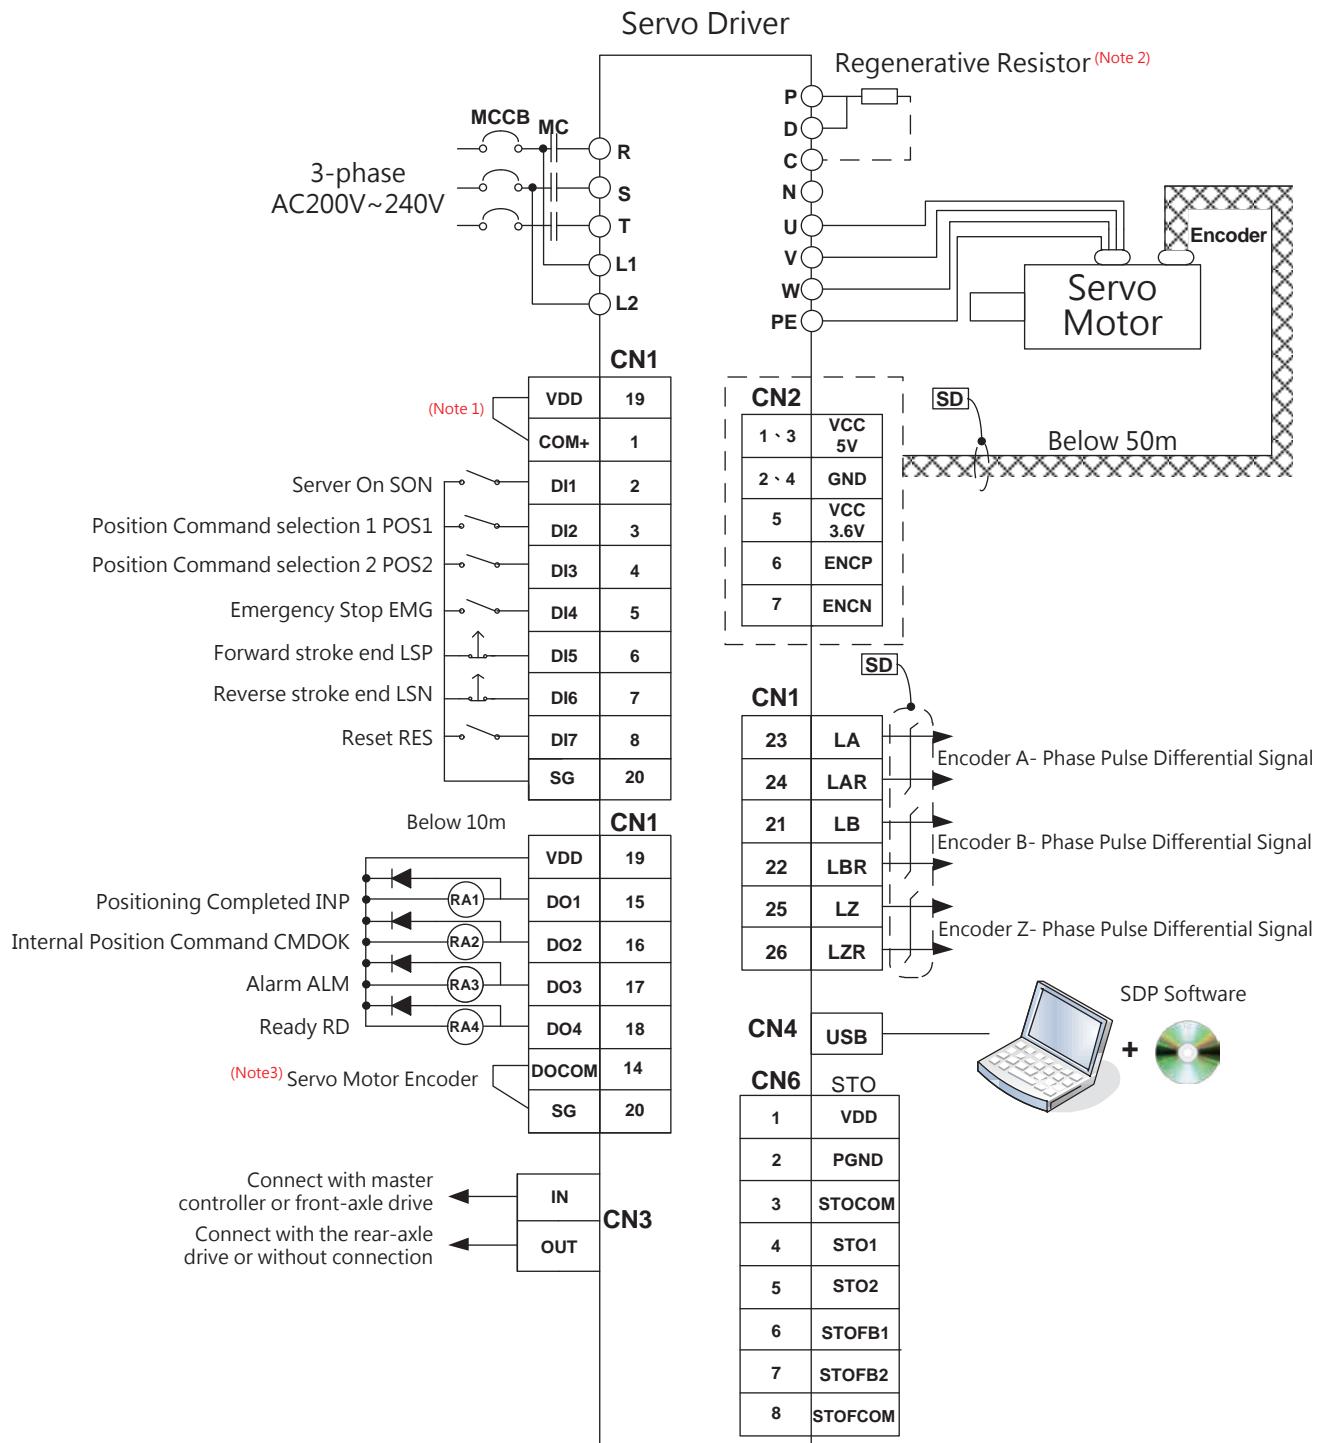


Notes

Note 1 : If external power is used, VDD cannot be connected to COM +.

Note 2 : Please refer to the manual for the wiring of regenerative resistor and brake units.

Note 3 : Please refer to the manual for the Sink Type and Source Type DO output wiring.

S Mode: Speed Control Mode

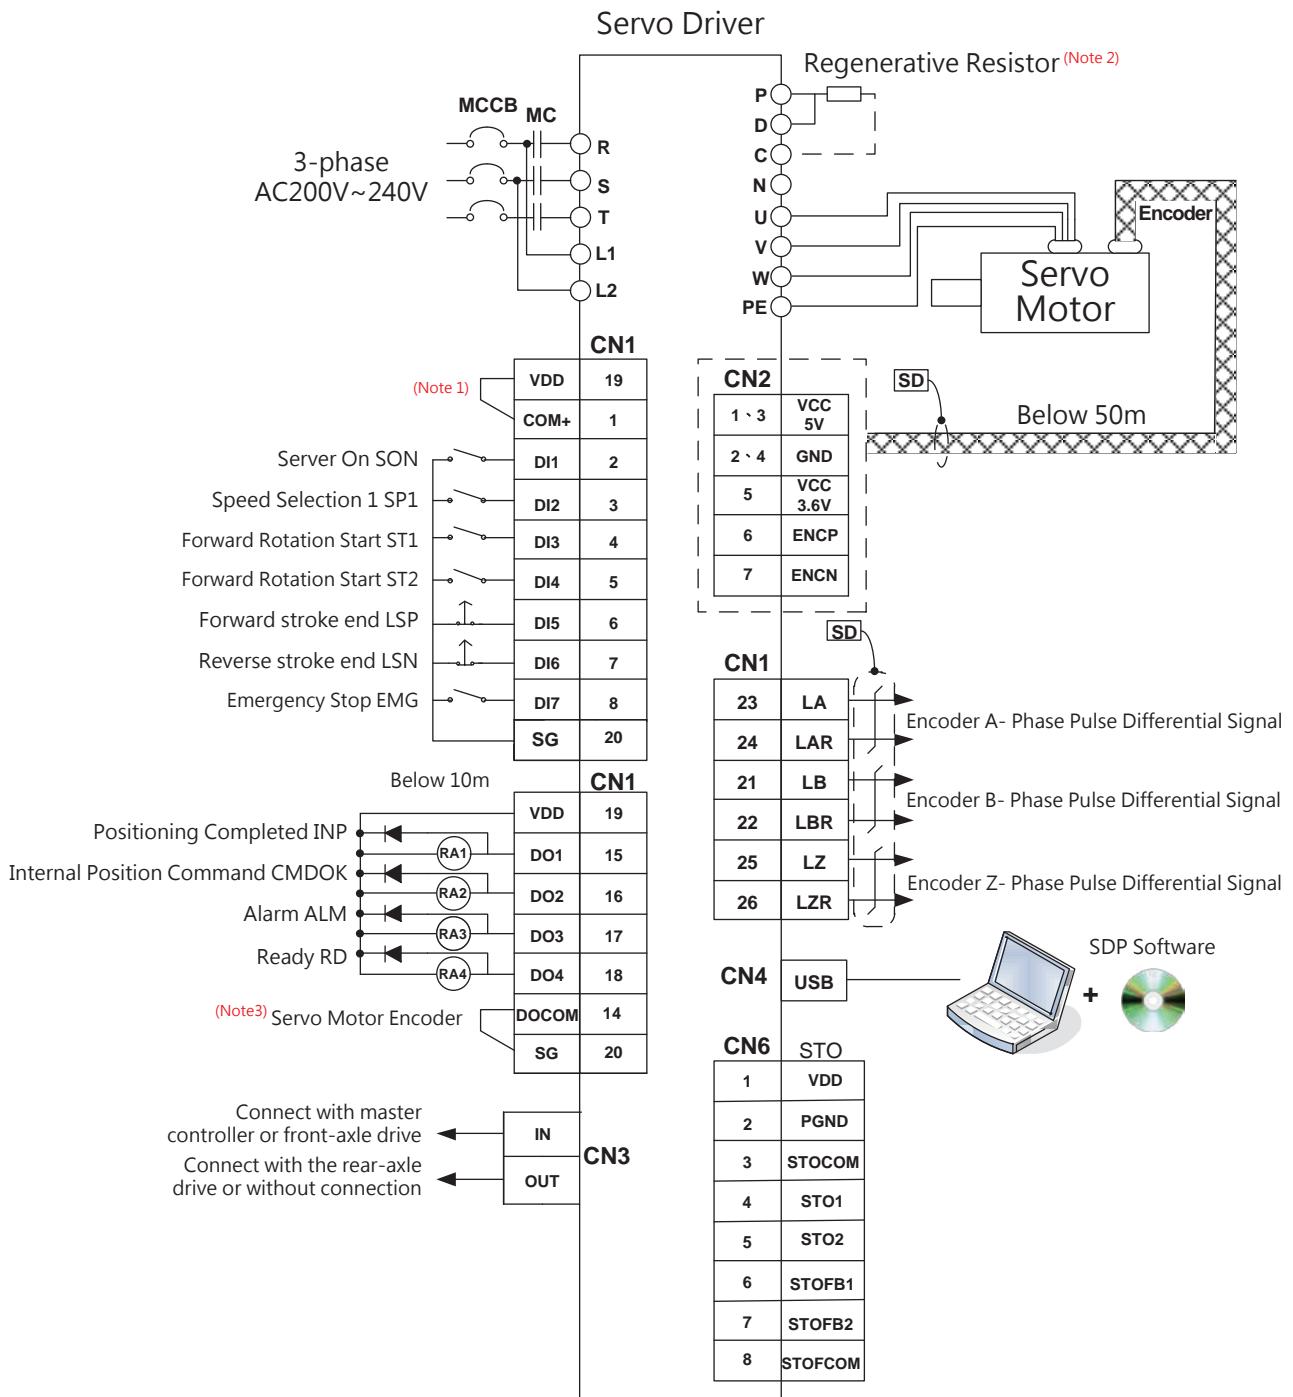


Notes

Note 1 : If external power is used, VDD cannot be connected to COM +.

Note 2 : Please refer to the manual for the wiring of regenerative resistor and brake units.

Note 3 : Please refer to the manual for the Sink Type and Source Type DO output wiring.

Connections with Peripheral Equipment

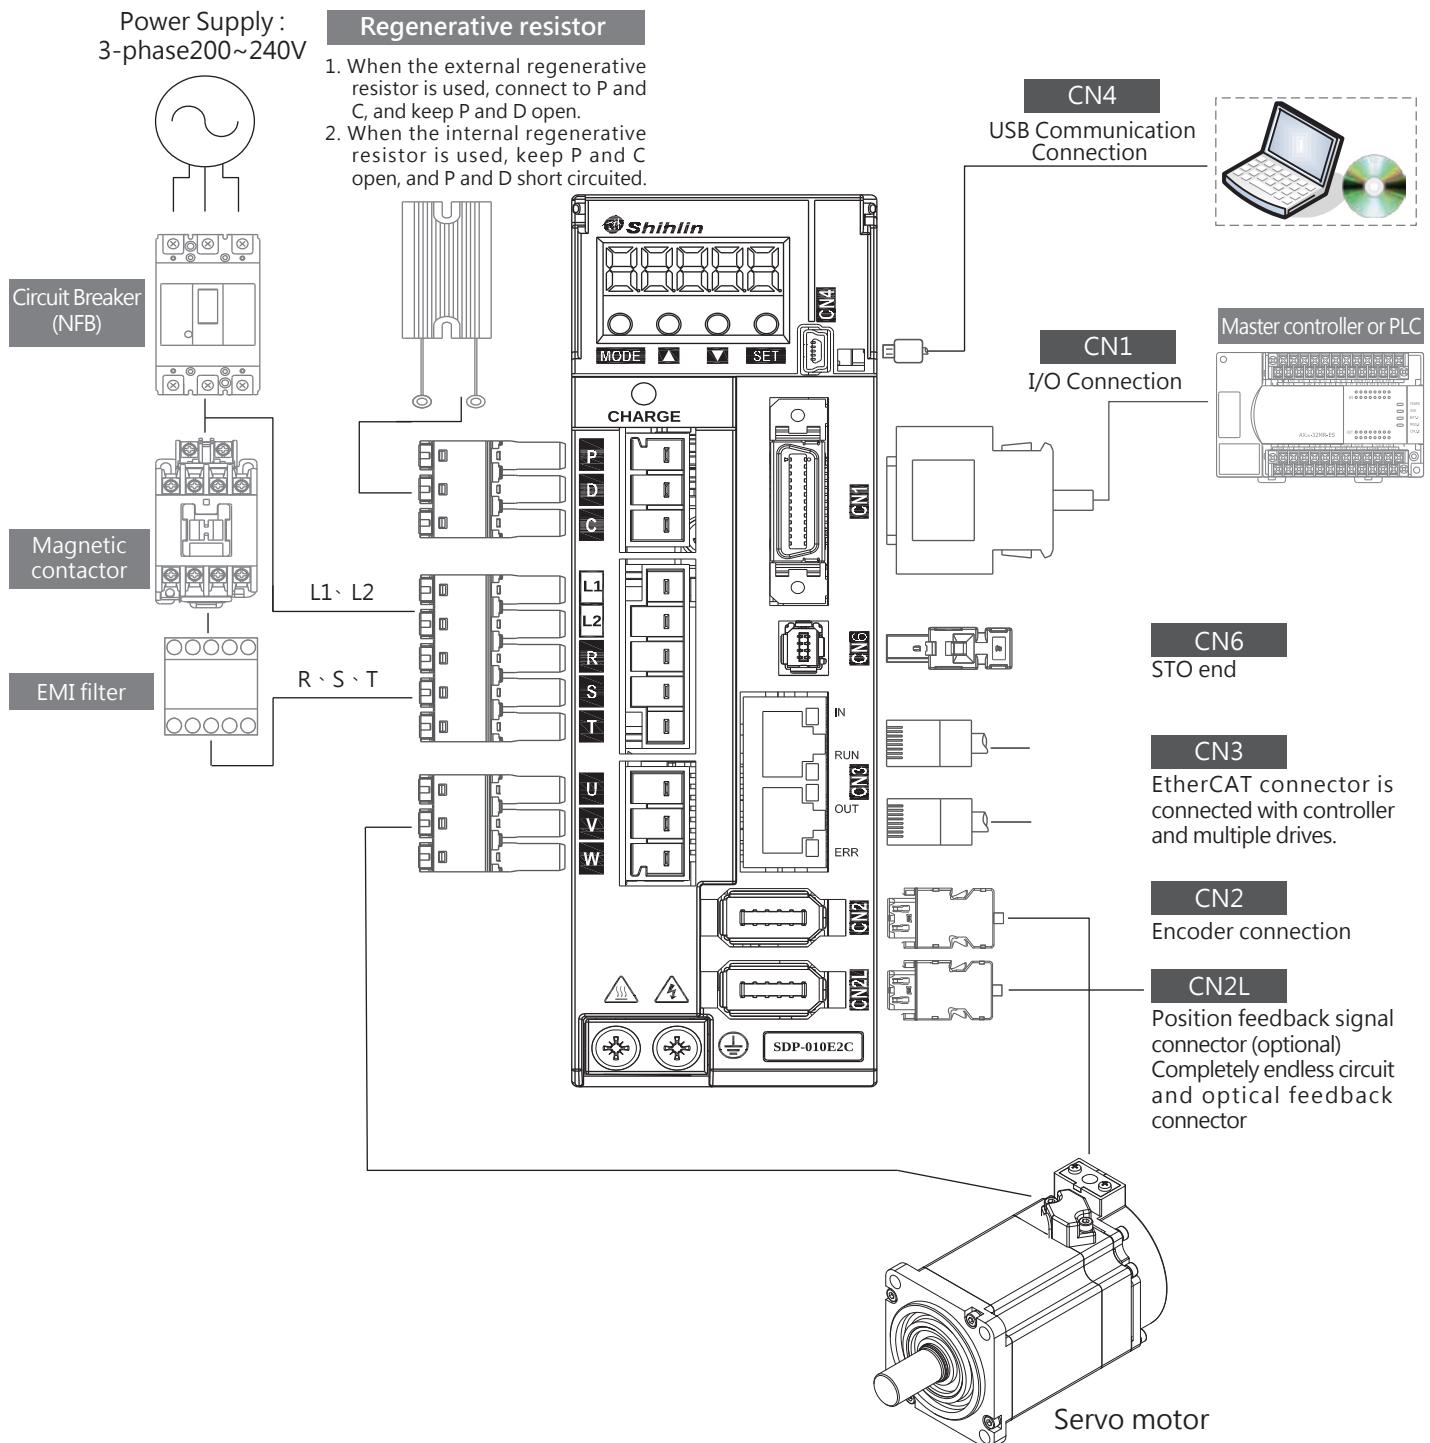


Notes

1. Connect external regeneration unit, please remove P and D short circuit line and connect external resistor to P、C point. Every capacity has its related resistor value, please refer to "Instruction Manual".
2. Dedicated power cable is necessary with a brake motor, the exclusive power cable must be prepared and requires inputting DC24V power. Please don't use drive internal VDD connector for power. Please refer to "Operation Manual" for details.
3. The usage of absolute position, please select the optional battery "SDH-BAT-SET".


Servo Drive Dimensions

Unit : mm


SDP-005E2C、SDP-010E2C SDP-020E2C、SDP-040E2C

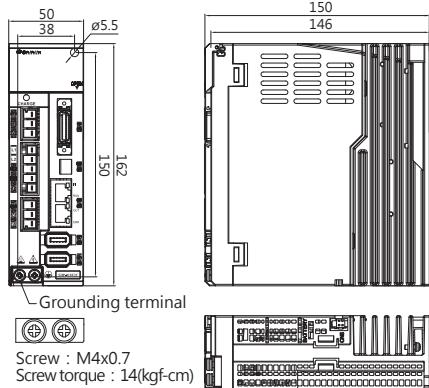


SDP-075E2C、SDP-100E2C

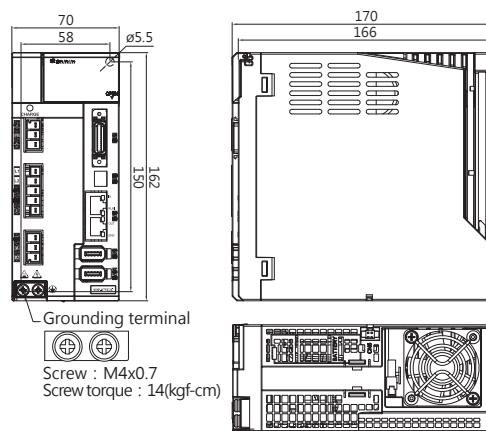


SDP-150E2C、SDP-200E2C SDP-300E2C

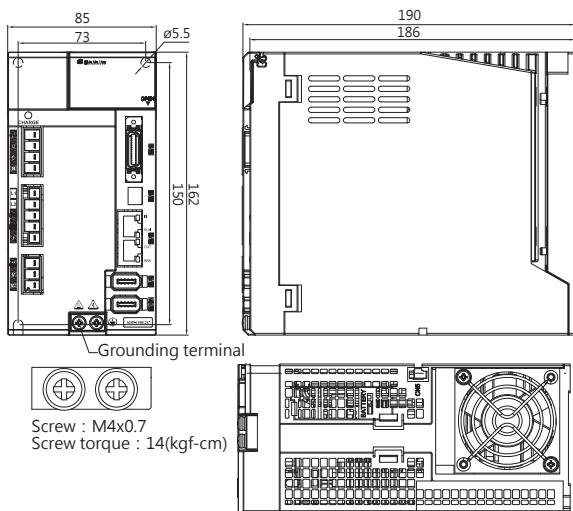

SDP-500E2C

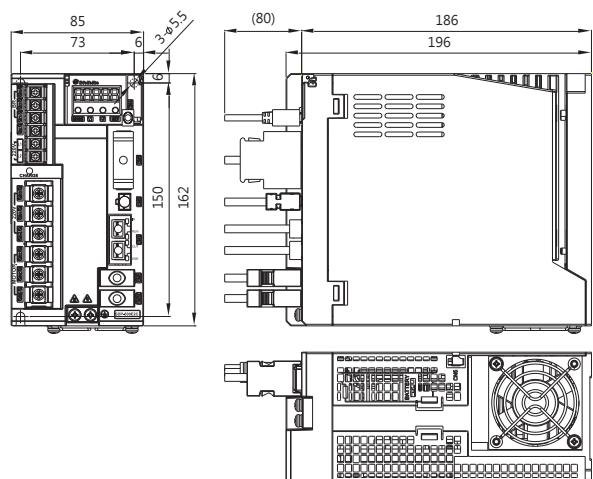






SDP-700E2C

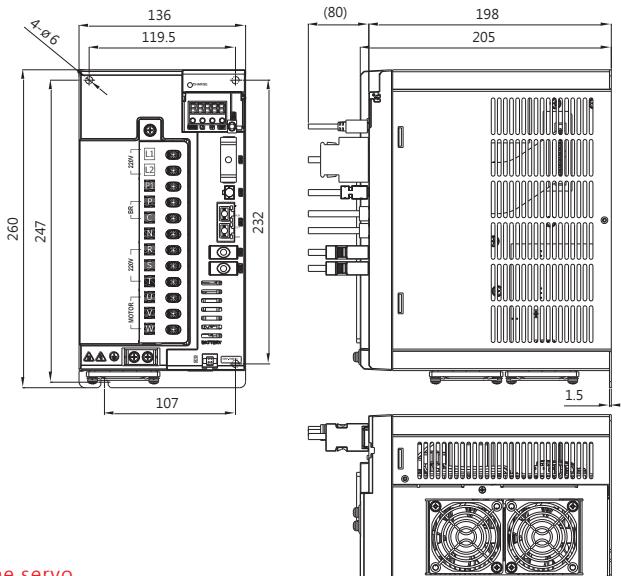

Note : Dimensions and weights of the servo drive may be revised without prior notice.
Please refer to Shihlin official website.


Servo Motor Torque Curves

SMP-L□□□30 series torque characteristics*

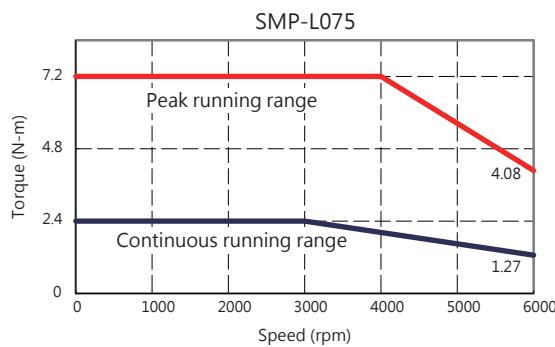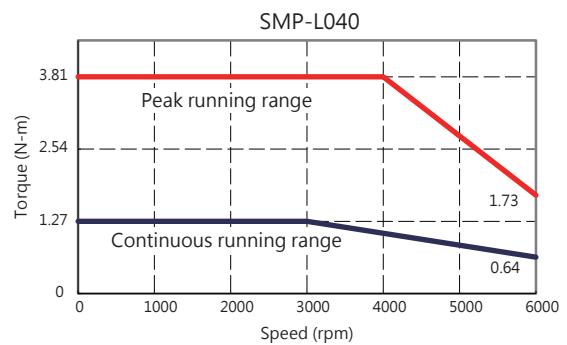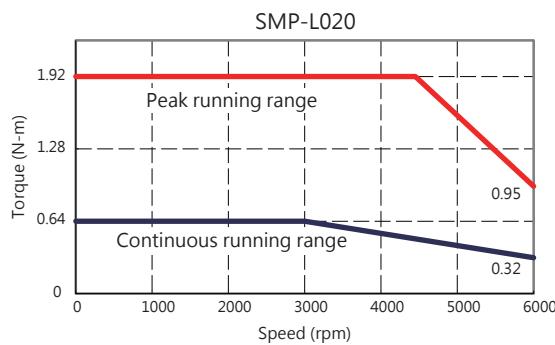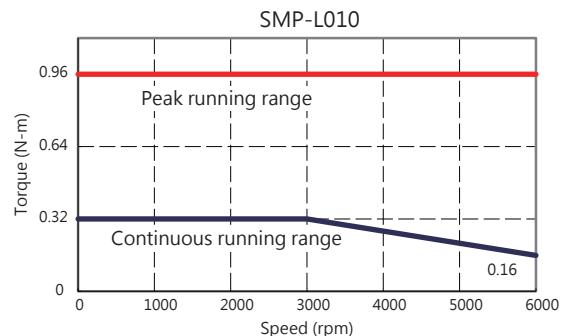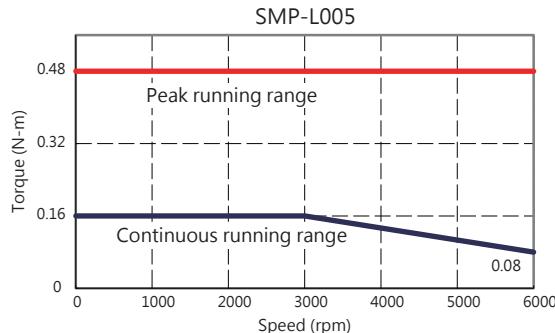


* Above is the torque characteristic curve for motor with the power 3-phase 220V.
When the voltage is insufficient, the torque characteristic will be reduced.

SMP-L□□□20 series torque characteristics*

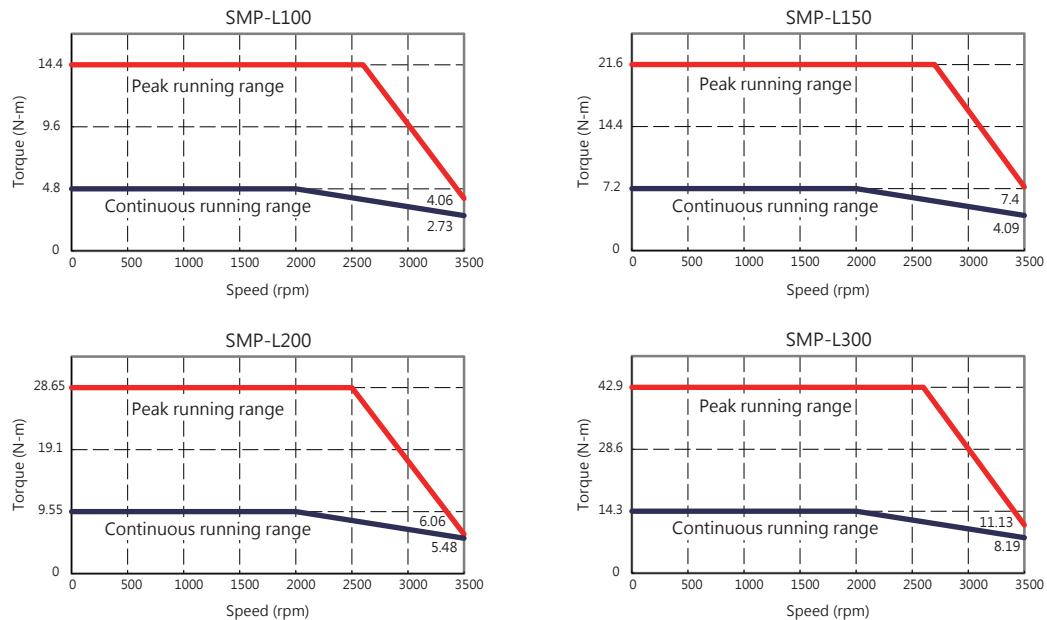


* Above is the torque characteristic curve for motor with the power 3-phase 220V.
When the voltage is insufficient, the torque characteristic will be reduced.

SMP-M□□□20 series torque characteristics*

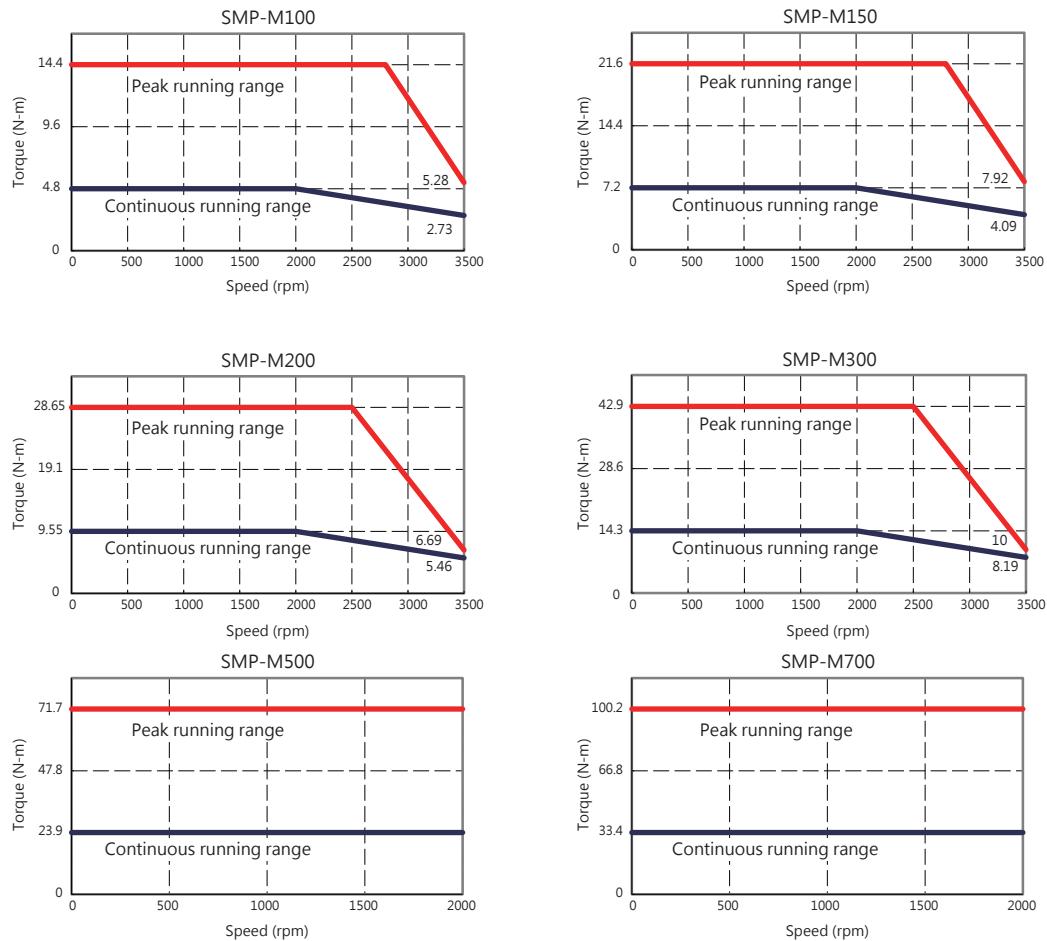

Dimensions


Small Capacity, Low Inertia SMP-L□□□30

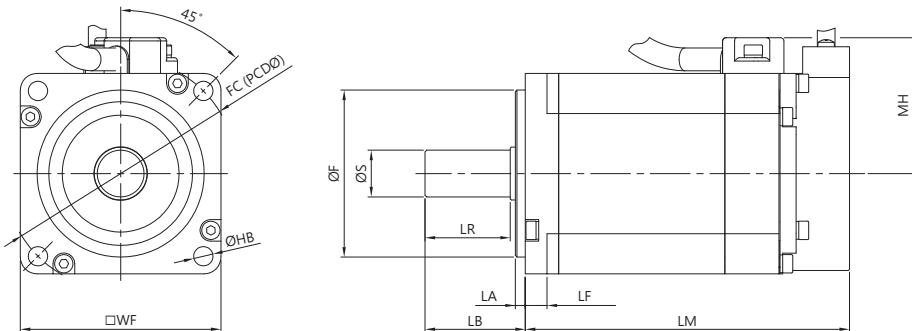

Model	Variable dimensions (mm)										
	WF	ϕS	ϕF	LA	LB	LF	LR	MH	LM*	FC	HB
SMP-L005	40	$\phi 8 {}^0_{-0.009}$	$\phi 30 {}^0_{-0.03}$	2.5	25	5.5	21.5	32	64.5 (99.2)	46	2- $\phi 4.5$
SMP-L010									80.0 (114.7)		
SMP-L020	60	$\phi 14 {}^0_{-0.011}$	$\phi 50 {}^0_{-0.03}$	3	30	6.5	25	42	77.0 (112)	70	4- $\phi 5.8$
SMP-L040									97.0 (132)		
SMP-L075	80	$\phi 19 {}^0_{-0.013}$	$\phi 70 {}^0_{-0.03}$	3	40	7.5	35.5	52	101.2 (140.2)	90	4- $\phi 6.6$

**()* Dimensions in brackets are for the models with electromagnetic brake.


Medium Capacity, Medium Inertia SMP-L□□□20

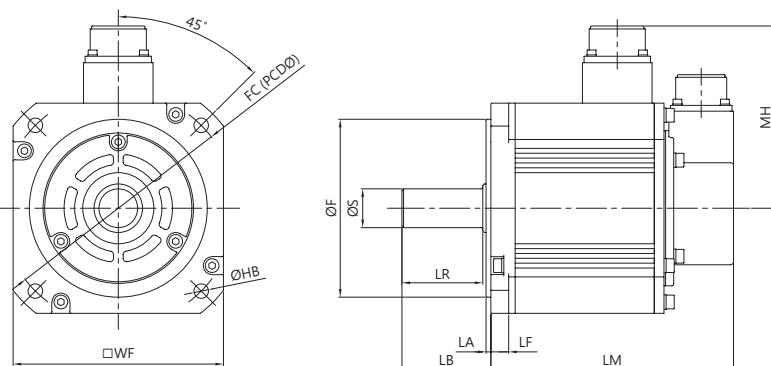

Model	Variable dimensions (mm)										
	WF	ϕS	ϕF	LA	LB	LF	LR	MH	LM*	FC	HB
SMP-L100	130	$\phi 24 {}^0_{-0.013}$	$\phi 110 {}^0_{-0.035}$	3	55	11	50	113	127 (161)	145	4- $\phi 9.0$
SMP-L150									141.5 (175.5)		
SMP-L200									156 (190)		
SMP-L300									185 (219)		

**()* Dimensions in brackets are for the models with electromagnetic brake.


■ Medium Capacity, Medium Inertia SMP-M□□□20

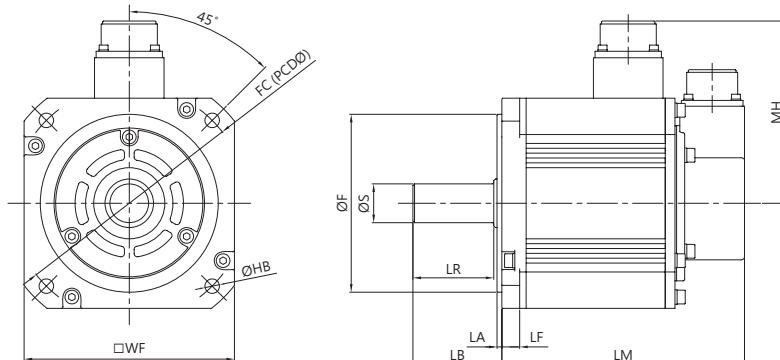


Model	Variable dimensions (mm)										
	WF	ϕS	ϕF	LA	LB	LF	LR	MH	LM*	FC	HB
SMP-M100	130	$\phi 24^0_{-0.013}$	$\phi 110^0_{-0.035}$	3	55	11	50	113	127 (161)	145	4- $\phi 9.0$
SMP-M150									141.5 (175.5)		
SMP-M200	176	$\phi 35^0_{-0.016}$	$\phi 114.3^0_{-0.025}$	3	78	18.5	74	139	139 (189)	200	4- $\phi 13.5$
SMP-M300									169 (219)		
SMP-M500									189 (239)		
SMP-M700									229 (279)		

■ Motor Shaft Dimensions

D-cut for L005 / L010








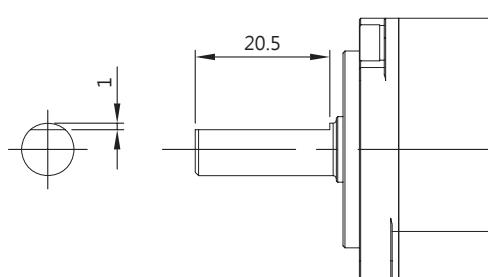


Key-way

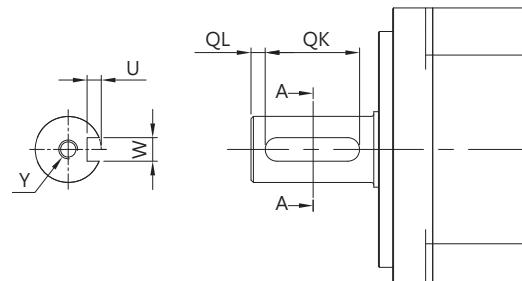

Model	Variable dimensions (mm)				
	QL	QK	W	U	Y
L020 / L040	3	20	$5^0_{-0.03}$	3	M4 x Depth 15
L075	5	25	$6^0_{-0.03}$	3.5	M5 x Depth 20
L100 / L150 / L200 / L300 M100 / M150	5	35	$8^0_{-0.036}$	4	M8 x Depth 20
M200 / M300 / M500 / M700	5	55	$10^0_{-0.036}$	5	M8 x Depth 20

Optional Accessories

Item			Model	Content	SMP	
					L	M
Motor cable	50W~750W No brake	Connector	SDA-PWCNL1		●	
		Cable	SDE-PWCNL1-□M-L/H <small>*1 *2</small>			
	50W~750W Brake	Connector	SDA-PWCNL2		●	
		Cable	SDE-PWCNL2-□M-L/H <small>*1 *2</small>			
	1KW/1.5KW 1K/1.5K/2K/3K	Connector	SDA-PWCNM1		●	●
		Cable	SDE-PWCNM1-□M-L/H <small>*1 *2</small>			
		Cable for electromagnetic brake	SDE-PWCNM1B-□M-L/H			
	2KW/3K	Connector	SDA-PWCNM2			●
		Cable	SDE-PWCNM2-□M-L/H <small>*1 *2</small>			
		Cable for electromagnetic brake	SDE-PWCNM2B-□M-L/H			
	SMP-M 5kW/7kW	Connector	SDH-PWCNM4	 		●
		Cable 5kW	SDH-PWCNM4-□M-L/H			
			SDH-PWCNM5-□M-L/H			
		Brake Connector	SDH-BKCNS1			
		Brake Cable	SDH-BKCNS1-□M-L/H			
For CN1	I/O connector		SDP-CN1		●	●
	Terminal block and wire set		SDP-TB26		●	●
			SDP-TBL05M SDP-TBL1M SDP-TBL2M		●	●
For CN2	50W~750W	Connector	SDH-ENL		●	
		Cable	SDH-ENL-□M-L/H <small>*1 *2</small>		●	
	1KW~3KW	Connector	SDH-ENM		●	●
		Cable	SDH-ENM-□M-L/H <small>*1 *2</small>		●	●
For CN2L	Fully closed loop	Connector	SDH-CN2		●	●
		Cable	SDH-CN2L-05M			
For CN3	EtherCAT cable		SDP-CN3-□M		●	●
For CN4	USB communication cable		SDA-USB3M		●	●
For CN5	Absolute encoder battery set		SDH-BAT-SET		●	●
	Absolute encoder battery set		SDH-BAT		●	●
For CN6	STO communication cable		SDP-CN6-□M		●	●

*1 : □ Indicates the cable length. Standard: 2M・3M・5M・10M; Special order: other length.

*2 : L and H indicate bending life. L: standard, H: long bending life.

EtherCAT Master Controller Information

Master Controllers



ITRI



E-MP-Z

BECKHOFF



CX5130-0122

NEXCOM



NET 3600E-ECM

SCHLEICHER



XCI 600

OMRON



NJ301



NJ501



NX1P2

Controller



KINGSTAR



Codesys



TwinCAT



Softservo WMX2



Shihlin SDP Series



Recommended Specification

Model	Talos-3012	Talos-2110	PCIe-8338	PCI-1203
Cycle time	250 / 500 / 1000 µs	250 / 500 / 1000 µs	250 / 500 / 1000 µs	500 µs
Supported axis	64	64	64	32
I/O points	External addition	4DI / 4DO	4DI / 4DO	8DI / 4DO

SDP Series AC SERVO SYSTEM

The Best Drive for Smart Machinery



Head Office:

16F, No. 88, Sec. 6, ChungShan N. Rd.,
Taipei, Taiwan, 111

TEL: +886-2-2834-2662
FAX: +886-2-2836-6187

HsinFun Factory (Taiwan)

No.234, ChungLun, HsinFun,
HsinChu, Taiwan, 304
TEL: +886-3-599-5111
FAX: +886-3-590-2167

SuZhou Factory (China)

No.88, Guangdong Street, Suzhou New District,
Jiangsu, China, 215129
TEL: +86-512-6843-2662
FAX: +86-512-6831-1917

Official website www.seec.com.tw

Automation Division website automation.seec.com.tw
automation@seec.com.tw

Specification in this catalog are subject to change without notice for ongoing product modification and improvements.

© 2021.03 Shihlin Electric & Engineering Corporation. All rights reserved. B210322E.SDP-BO3